
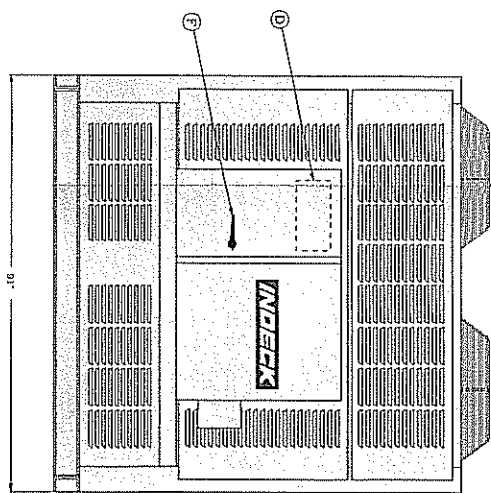


200 TON AIR COOLED RENTAL CHILLER

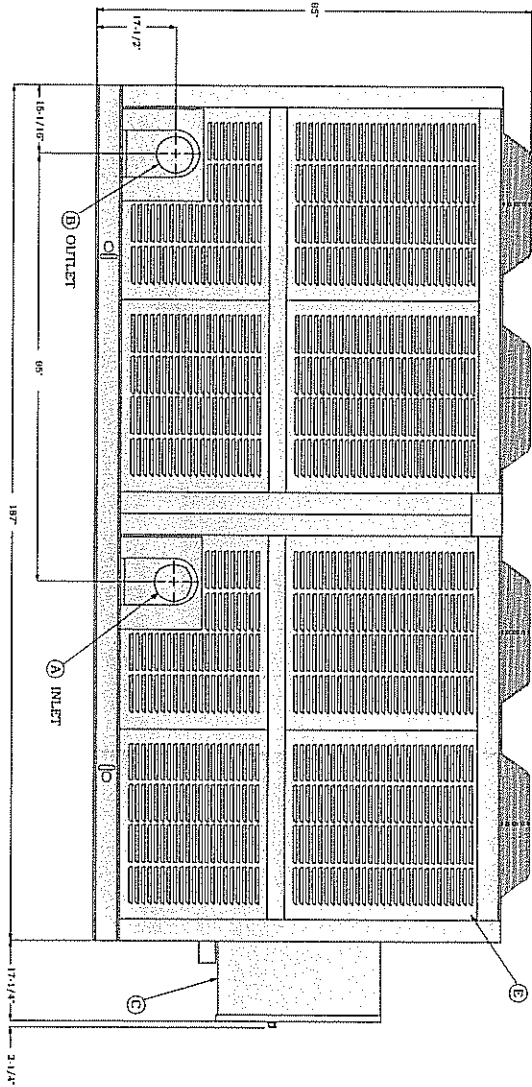

INSTALLATION SERVICE CONNECTIONS

- (A) PIPING INLET 6" VICTAULIC FITTING FROM CHILLER
- (B) PIPING OUTLET 6" VICTAULIC FITTING FROM HEADER (PROVIDED)
- (C) POWER SUPPLY TO SUPPLIED PRE-WIRED DISCONNECT (INCLUDES 25% OVERLOAD PROTECTION FOR 1 COMPRESSOR 480V/3PH/60 CYCLE/428 AMPS MIN.)
- (D) MICROPROCESSOR CONTROL PANEL
- (E) LOUVERS COMPLETELY ENCLOSE ENTIRE UNIT
- (F) DISCONNECT SWITCH

NOTE: HEATERS MUST BE TURNED ON IN SUFFICIENT TIME TO BLOW OUT REFRIGERANT PRIOR TO STARTUP.

MODULAR HEADER SYSTEM (SHIPPED LOOSE)

- (1) 6" VICTAULIC TO 6" FLANGED FITTING ADAPTOR
- (2) 6" FLANGED 90 DEGREE ELBOWS
- (3) 6" SHUTOFF VALVES
- (4) 6" FLANGE TO FLANGE SPOOL PIECE W/ INSTRUMENT THREADOLETS
- (5) 6" INLET STRAINER
- (6) FLOW SWITCH - MUST BE MOUNTED IN OUTLET SPOOL PIECE
- (7) PRESSURE GAUGES
- (8) THERMOMETERS
- (9) PLUS MISC. BALL VALVES, FITTINGS, ETC.

DESIGN DATA

LENGTH:	206 1/2"
WIDTH:	91"
HEIGHT:	95"
WEIGHT: (SHIPPING)	13,975 LBS
CAPACITY (TONS) NOMINAL:	192
MIN. / MAX. WATER TEMPS.:	40-50 DEG. F.
MAX. WATER PRESSURE:	5-30 DEG. F.
MIX. WATER FLOW:	150 PSI
MAX. WATER FLOW:	200 GPM
LOW AMBIENT:	700 CHM
	TO 0 DEG. F.