



75 TON AIR COOLED RENTAL CHILLER

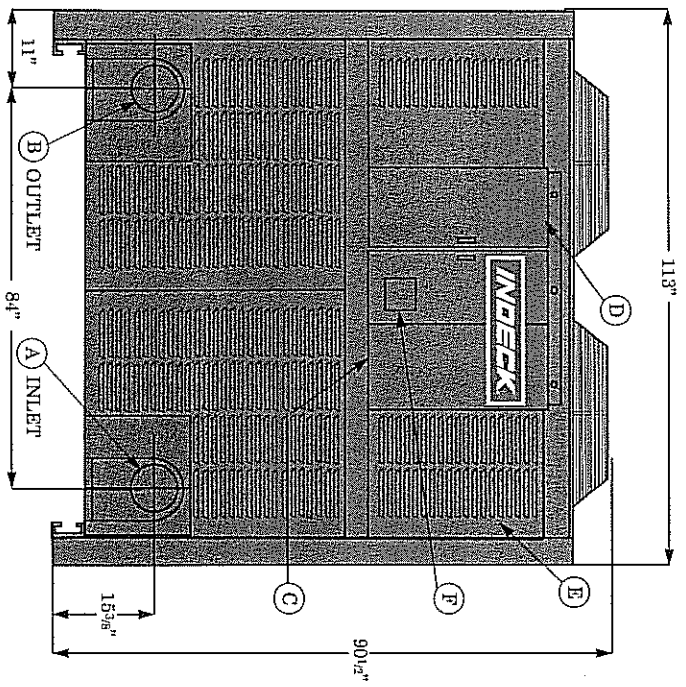

FRONT VIEW

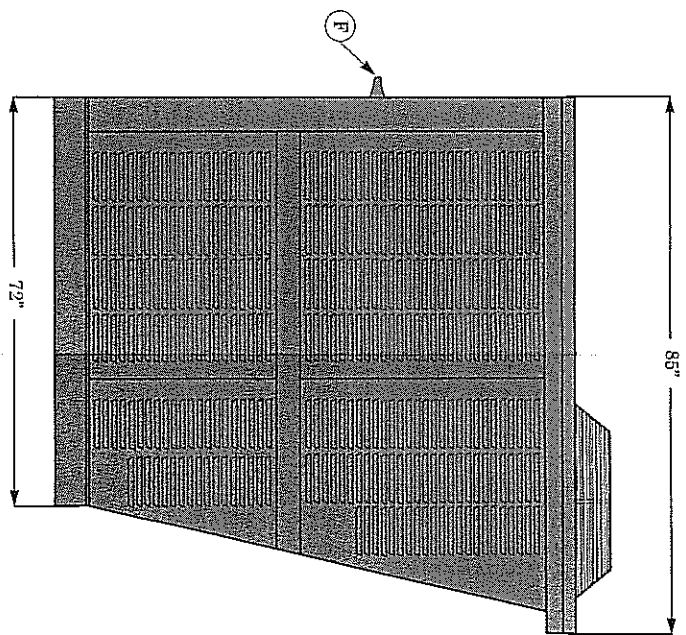

SIDE VIEW

INSTALLATION SERVICE CONNECTIONS

- (A) PIPING INLET 6" VICTAULIC FITTING FROM CHILLER 6" FLANGED FITTING FROM HEADER (PROVIDED)
 - (B) PIPING OUTLET 6" VICTAULIC FITTING FROM CHILLER 6" FLANGED FITTING FROM HEADER (PROVIDED)
 - (C) POWER SUPPLY TO SUPPLIED PRE-WIRED DISCONNECT 480Y/277V 3PH 3W 40 AMP MIN. (INCLUDES 25% OVERLOAD PROTECTION FOR COMPRESSOR)
 - (D) MICROPROCESSOR CONTROL PANEL
 - (E) LOUVERS COMPLETELY ENCLOSE ENTIRE UNIT
 - (F) DISCONNECT SWITCH
- NOTE: HEATERS MUST BE TURNED ON IN SUFFICIENT TIME TO BOIL OUT REFRIGERANT PRIOR TO STARTUP

MODULAR HEADER SYSTEM (SHIPPED LOOSE)

- (1) 6" VICTAULIC TO 6" FLANGED FITTING ADAPTOR
- (2) 6" FLANGED 90 DEGREE ELBOWS
- (3) 6" SHUTOFF VALVES
- (4) 6" FLANGE TO FLANGE SPOOL PIECE W/INSTRUMENT THREADOLETS
- (5) 6" FLANGED INLET STRAINER
- (6) FLOW SWITCH- MUST BE MOUNTED IN OUTLET SPOOL PIECE
- (7) PRESSURE GAUGES
- (8) THERMOMETERS
- (9) PLUS MISC. BALL VALVES, CLAMPS, ETC.

DESIGN DATA

LENGTH (BASED):	113"
WIDTH:	85"
HEIGHT:	90 1/2"
WEIGHT (SHIPPING):	5,676 LBS
CAPACITY (TONS) NOMINAL:	70.8
MIN. / MAX. WATER TEMPS.:	40-60 DEG. F
MIN. / MAX. BRINE TEMPS.:	15-30 DEG. F
MAX. WATER PRESSURE:	150 PSI
MIN. WATER FLOW:	50 GPM
MAX. WATER FLOW:	315 GPM
LOW AMBIENT:	TO 0 DEG. F
HIGH AMBIENT:	TO 110 DEG. F