


UNIT REFERENCE:
 20V 15-001B3
 20V 15-001B3

60,000 PPH RENTAL DEAERATOR

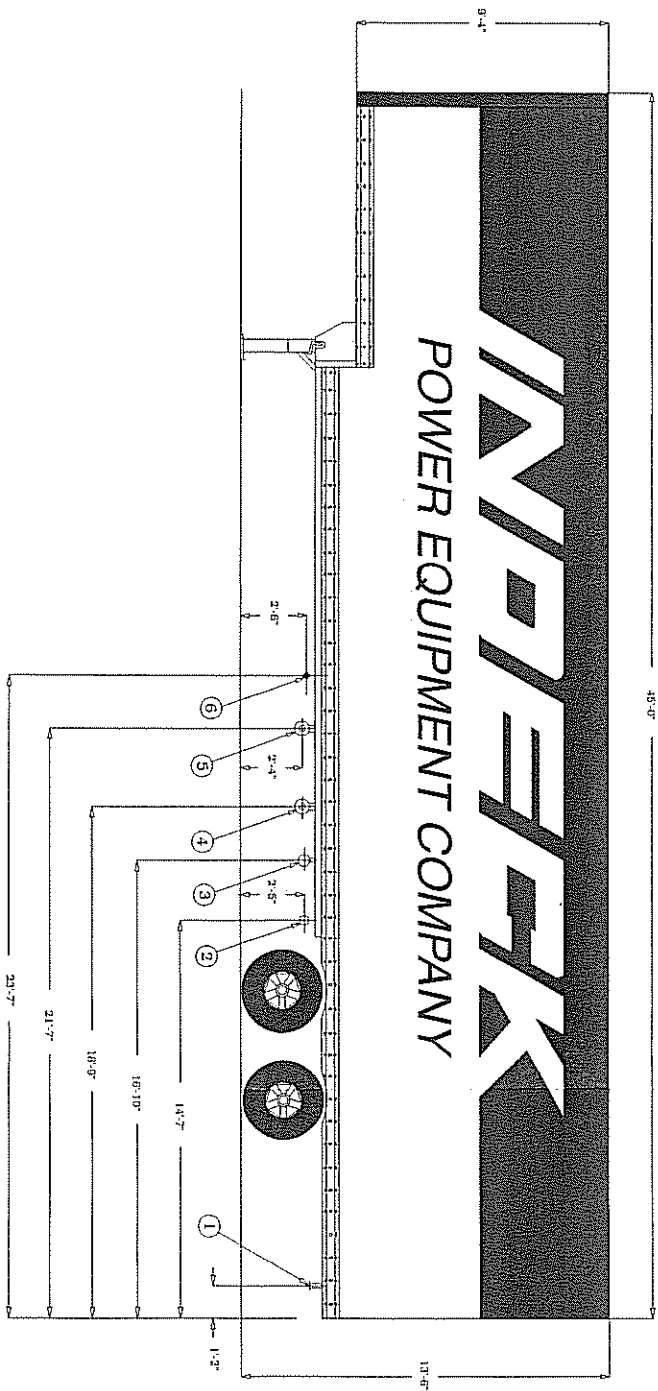

INSTALLATION SERVICE CONNECTIONS

1. LOW PRESSURE CONDENSATE RETURN 1 1/2"-300# FLANGED
2. STEAM VENT 1"-150# FLANGED
3. HIGH PRESSURE CONDENSATE RETURN 1 1/2"-300# FLANGED
4. HIGH PRESSURE CONDENSATE RETURN 1 1/2"-300# FLANGED (BOTH SIDES)
5. SUPPLY WATER INLET 1 1/2"-300# FLANGED (BOTH SIDES)
6. CHEMICAL FEED OUTLET 1 1/2" NPT (BOTH SIDES)
7. 480V/3/60 200 AMP. LOCATED ON OPPOSITE SIDE
8. SUPPLY WATER INLET 3"-150# FLANGED LOCATED ON OPPOSITE SIDE
9. DRAIN 4"-150# FLANGED

DESIGN DATA

- OVERALL LENGTH: 45'-0"
 OVERALL WIDTH: 8'-0"
 NET WEIGHT (INCL. TRAILER): 8,000 LBS.
 CONTINUOUS CAPACITY: FOR MAX. 60,000 PPH, 300 PSI.
 DESIGNED FOR: HIGHER CUSTOM PRESSURES AVAILABLE
 DOWN TO 10 MICRON.
 NOT MORE THAN .005cc/LITER
 TO ZERO
 40-100 PSI
 UP TO 1,000,000 GRAINS HARDNESS REMOVAL.
- FILTER CAPACITY:
 OXYGEN REMOVAL:
 CO2 REMOVAL:
 WATER PRESSURE:
 CONTINUOUS WATER SOFTENER CAPACITY:

NOTE: LOCATIONS MAY VARY SLIGHTLY BETWEEN MODELS

C.F. NO. TRAILER/60-DEA