


UNIT REFERENCE:
 15-07112
 70V 15-10261
 73V 15-08354
 77V 15-08355
 78V 15-09166

70,000 PPH RENTAL DEAERATOR

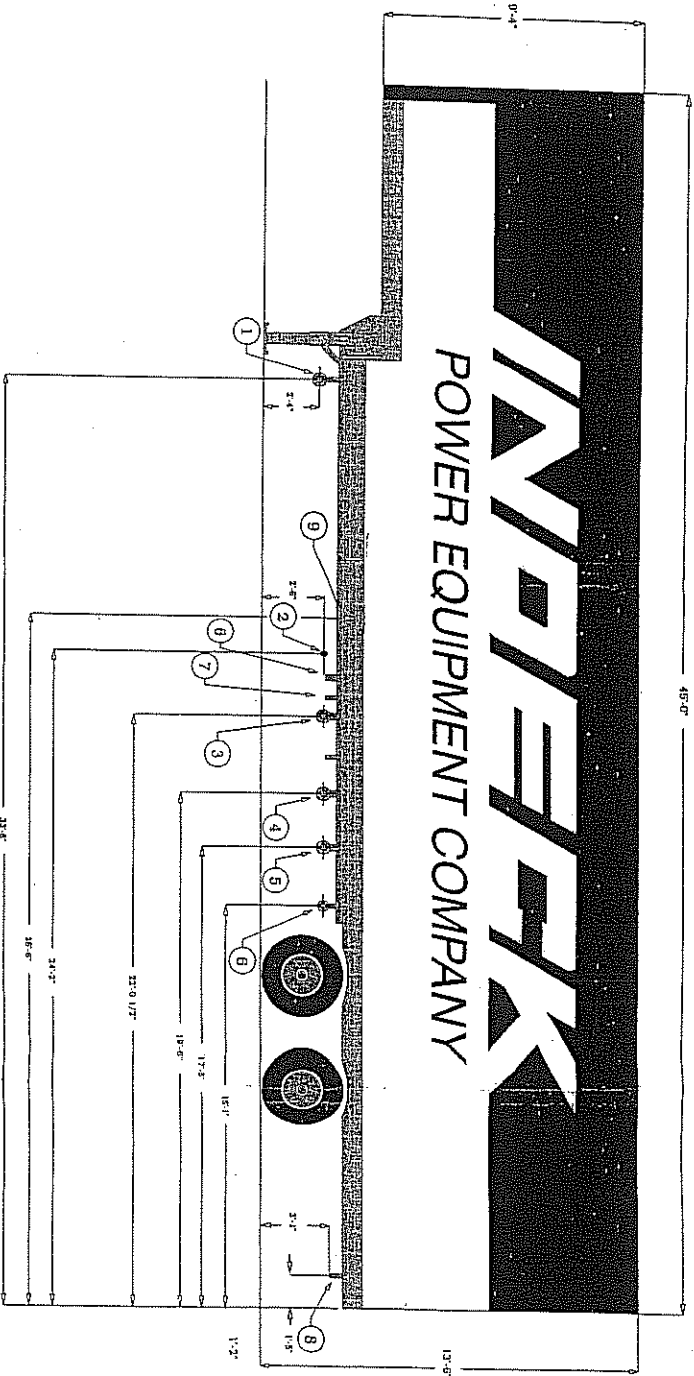

INSTALLATION SERVICE CONNECTIONS

1. SUPPLY WATER INLET 3"-150# FLANGED (LOCATED ON OPPOSITE SIDE)
2. CHEMICAL FEED OUTLET 3/4" NPT (BOTH SIDES)
3. SUPPLY STEAM INLET 2 1/2"-300# FLANGED (BOTH SIDES)
4. FEED WATER DISCHARGE 2 1/2"-300# FLANGED (BOTH SIDES)
5. HIGH PRESSURE CONDENSATE RETURN 1 1/2"-300# FLANGED
6. STEAM VENT (1"-150# FLANGED)
7. LOW PRESSURE CONDENSATE RETURN 1 1/2"-300# (LOCATED ON OPPOSITE SIDE)
8. DRAIN 3"-150# FLANGED
9. 480V/3/60 200 AMPS LOCATED ON OPPOSITE SIDE

DESIGN DATA

OVERALL LENGTH: 45'-0"
 OVERALL WIDTH: 8'-0"
 NET WEIGHT (INCL. TRAILER): 55,000 LBS
 CONTINUOUS CAPACITY: DESIGNED FOR MAX. 70,000 PPH, 250 PSI
 DESIGNED BOILER - HICHER CUSTOM PRESSURES AVAILABLE.
 OXYGEN REMOVAL: NOT MORE THAN .008cc/LITER
 WATER PRESSURE: 40-100 PSI
 CO₂ REMOVAL: TO ZERO

NOTE: LOCATIONS MAY VARY SLIGHTLY BETWEEN MODELS

C.F. NO. TRAILER/70-DEA