


75,000 PPH 395 PSI RENTAL BOILER

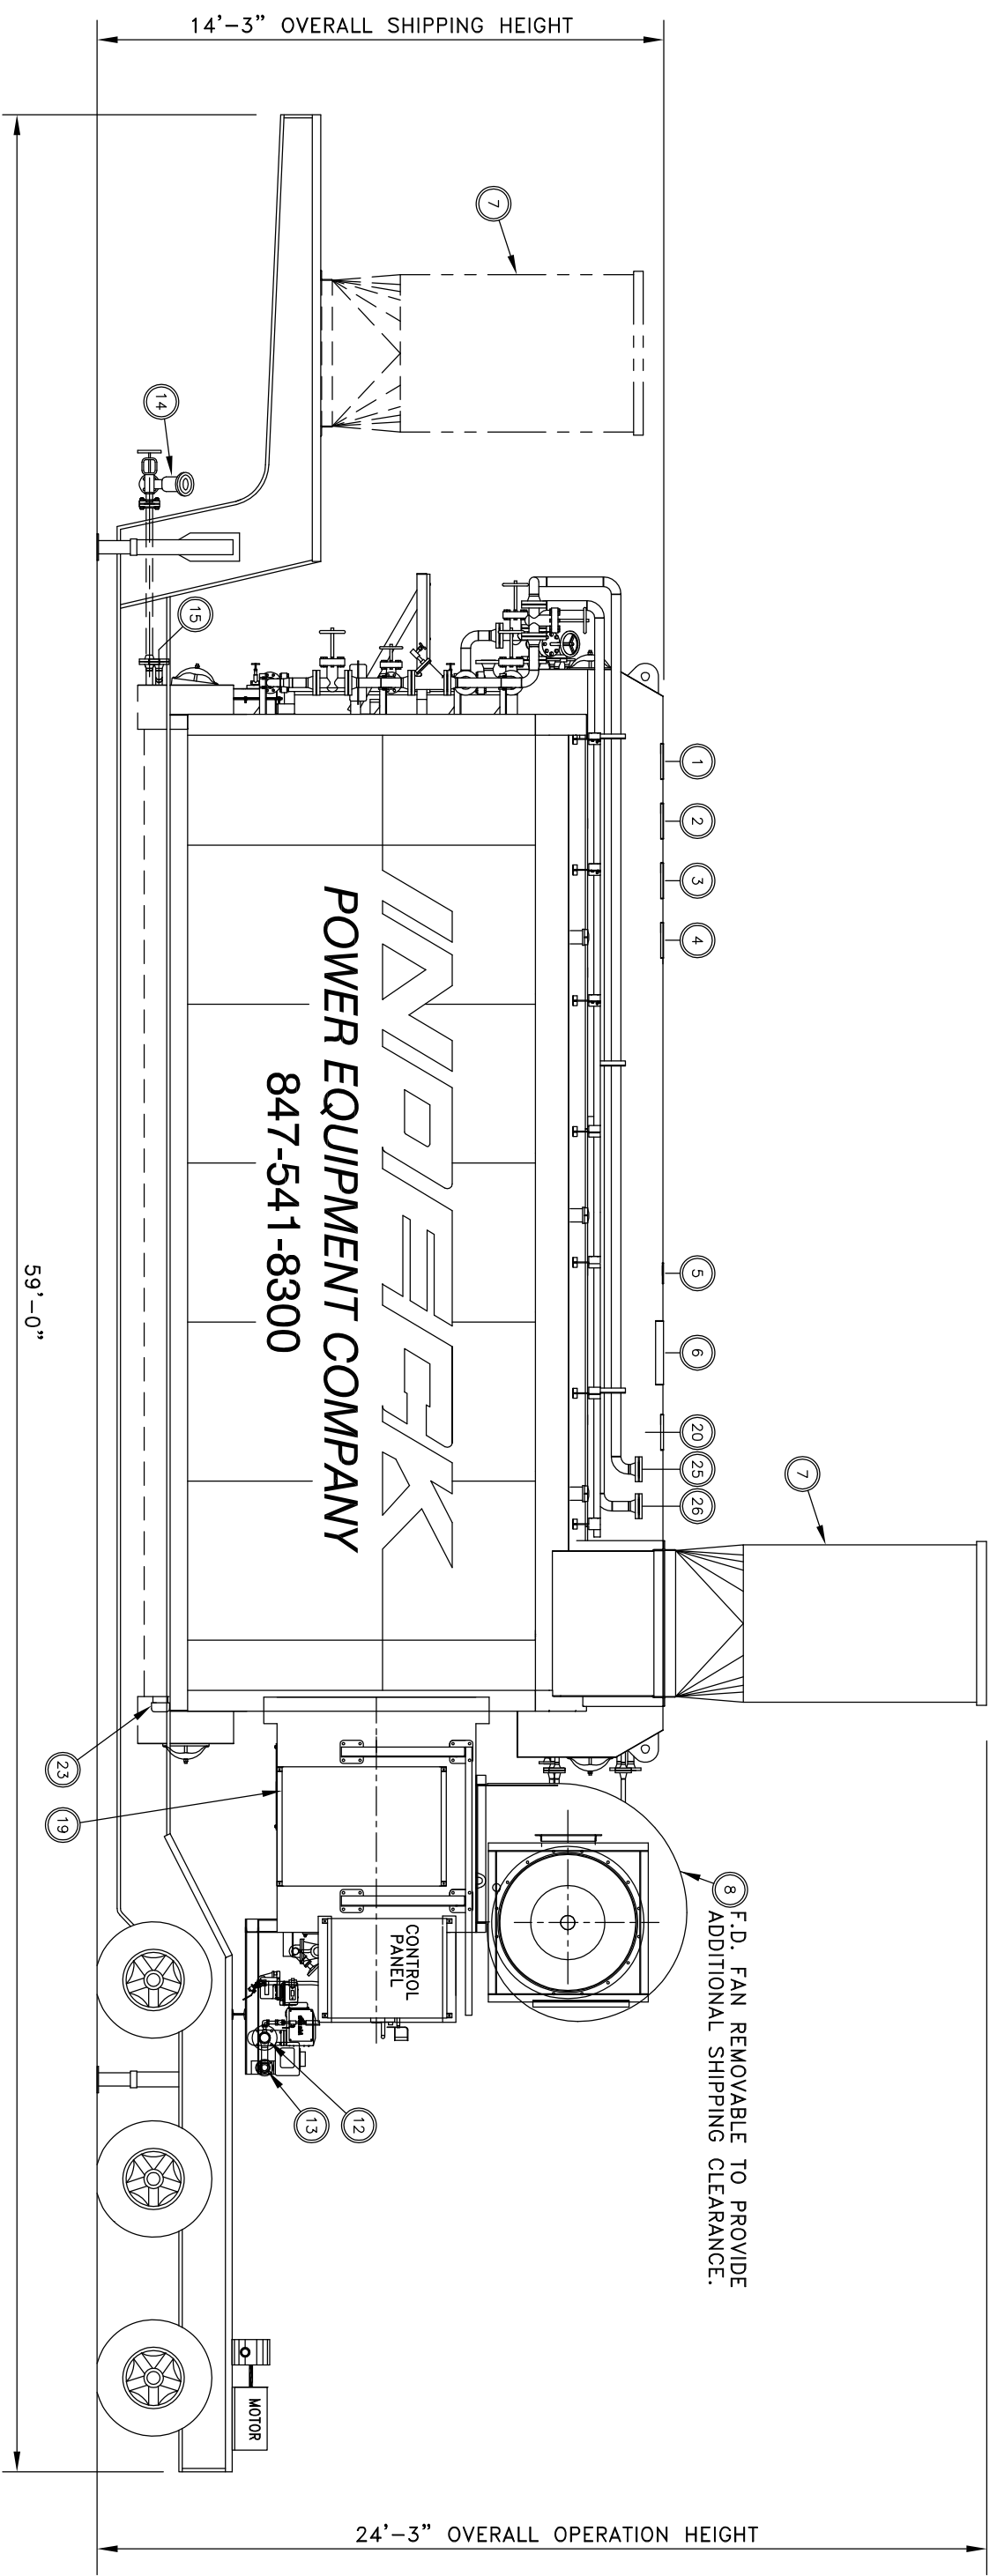

STEAM

1. 2 1/2"-300# SPARE (BLANKED)
2. 2 1/2"-300# SPARE (BLANKED)
3. 2 1/2"-300# SAFETY VALVE CONNECTION (SAFETY VALVE MUST BE REMOVED FOR TRANSPORT)
4. 2"-300# SAFETY VALVE CONNECTION (SAFETY VALVE MUST BE REMOVED FOR TRANSPORT)
5. 1" NPT DRUM VENT / AUX CONNECTION
6. 8"-300 # MAIN STEAM OUTLET CONNECTION
14. 1-1/2"-300# MUD DRUM BLOW OFF
15. 1-1/2"-300# LOW DRUM HEATING COIL CONNECTIONS ARE BLANKED.
17. 1" CONTINUOUS BLOWDOWN CONNECTION
20. 2"-300# SOOT BLOWER STEAM SUPPLY CONNECTION (BLANK ON FAR SIDE)
24. 1 1/2"-300# HEATING COIL (BLANKED)

BOILER FEEDWATER

18. 2-1/2"-300# FEEDWATER SUPPLY CONNECTION

FUEL GAS

7. FLUE GAS STACK AND TRANSITION (REMOVED FOR TRANSPORT)
10. 3/4" NPT PILOT GAS CONNECTIONS (NATURAL OR PROPANE)
12. 3"-150 # FUEL GAS CONNECTION
13. 1 1/2"-150 # GAS VENT OUTLET

FUEL OIL

11. 3/4" NPT FUEL OIL INLET (LOCATED ON FAR SIDE OF TRAILER)

ATOMIZING STEAM

9. 1 1/2"-300# AUX ATOMIZING AIR / STEAM CONNECTION (LOCATED BEHIND CABINET)

ELECTRICAL

19. 480/60/3 POWER SUPPLY 179 AMPS

MISC.

8. F.D. FAN HOUSING
16. 1" NPT CHEMICAL FEED CONNECTION (LOCATED ON OPPOSITE SIDE OF TRAILER)
21. 2"-300# CHEMICAL CLEANING CONNECTION
22. 3/4" NPT FURNACE PRESS CONNECTION
23. WASHOUT
24. 1" NPT INSTRUMENT AIR CONNECTION

DESIGN DATA

OVERALL HEIGHT:	14'-3"
OVERALL LENGTH:	59'-0"
OVERALL WIDTH:	10'-6"
NET WEIGHT (INCL TRAILER):	94,600 LBS
CONTINUOUS CAPACITY:	75,000 PPH
DESIGN PRESSURE:	395 PSIG
FEEDWATER TEMPERATURE:	230 DEG F
FURNACE VOLUME:	1,128 CU. FT.
CONVECTION HEATING SURFACE:	4,317 SQ. FT.
RADIANT HEATING SURFACE:	796 SQ. FT.
TOTAL HEATING SURFACE:	5,113 SQ. FT. (A.S.M.E.)
GAS SUPPLY PRESSURE:	15 PSIG
OIL SUPPLY PRESSURE:	(REGULATED BY CUSTOMER)
FEED WATER PRESSURE:	30 PSIG FLOODED MAX.
INSTRUMENT AIR PRESSURE:	75-100 PSIG ABOVE OPERATING PRESSURE
	60 PSIG MIN.