


UNIT REFERENCE:
 20V 15-00163
 20V 15-00163

60,000 PPH RENTAL DEAERATOR

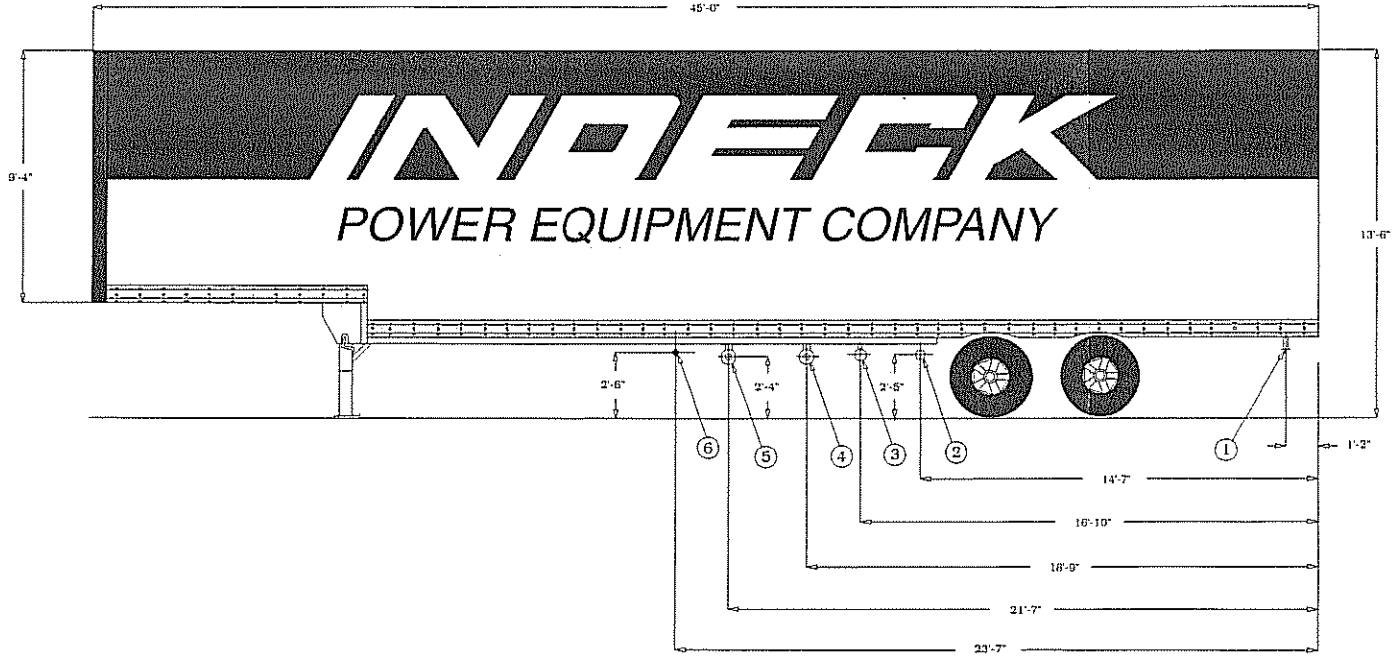

INSTALLATION SERVICE CONNECTIONS

1. LOW PRESSURE CONDENSATE RETURN 1 1/2"-300# FLANGED
2. STEAM VENT 1"-150# FLANGED
3. HIGH PRESSURE CONDENSATE RETURN 1 1/2"-300# FLANGED
4. FEED WATER DISCHARGE 2 1/2"-300# FLANGED (BOTH SIDES)
5. SUPPLY STEAM INLET 2 1/2"-300# FLANGED (BOTH SIDES)
6. CHEMICAL FEED OUTLET 1/2" NPT (BOTH SIDES)
7. 480V/3/60, 200 AMP, (LOCATED ON OPPOSITE SIDE)
8. SUPPLY WATER INLET 3"-150# FLANGED (LOCATED ON OPPOSITE SIDE)
9. DRAIN 4"-150# FLANGED

DESIGN DATA

| | |
|-------------------------------------|---|
| OVERALL LENGTH: | 45'-0" |
| OVERALL WIDTH: | 8'-0" |
| NET WEIGHT (INCL TRAILER): | 55,000 LBS |
| CONTINUOUS CAPACITY: | DESIGNED FOR MAX. 60,000 PPH, 300 PSI. DESIGNED BOILER - HIGHER CUSTOM PRESSURES AVAILABLE DOWN TO 10 MICRON. |
| FILTER CAPACITY: | NOT MORE THAN .005cc/LITER |
| OXYGEN REMOVAL: | TO ZERO |
| CO ₂ REMOVAL: | 40-100 PSI |
| WATER PRESSURE: | UP TO 1,800,000 GRAINS HARDNESS REMOVAL |
| CONTINUOUS WATER SOFTENER CAPACITY: | |

NOTE: LOCATIONS MAY VARY SLIGHTLY BETWEEN MODELS

C.F. NO. TRAILER60-DEA

INDECK 60,000 PPH RENTAL DEAERATOR
 INDECK POWER EQUIPMENT COMPANY
 1111 WELLS AVENUE, WHEELING, MARYLAND 21156