


UNIT REFERENCE:

15-07112
70V 15-10281
73V 15-08354
77V 15-08355
78V 15-08166

70,000 PPH RENTAL DEAERATOR

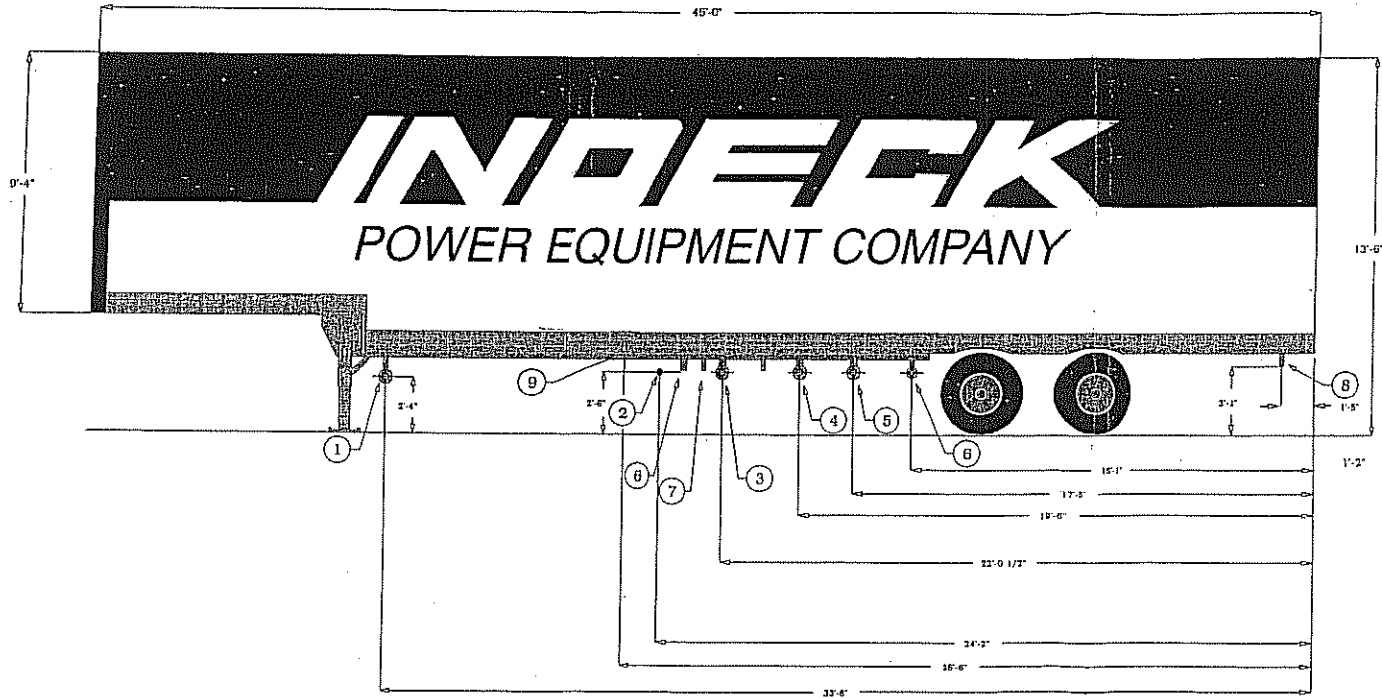

INSTALLATION SERVICE CONNECTIONS

1. SUPPLY WATER INLET 3"-150# FLANGED (LOCATED ON OPPOSITE SIDE)
2. CHEMICAL FEED OUTLET 3/4" NPT (BOTH SIDES)
3. SUPPLY STEAM INLET 2 1/2"-300# FLANGED (BOTH SIDES)
4. FEED WATER DISCHARGE 2 1/2"-300# FLANGED (BOTH SIDES)
5. HIGH PRESSURE CONDENSATE RETURN 1 1/2"-300# FLANGED
6. STEAM VENT (1"-150# FLANGED)
7. LOW PRESSURE CONDENSATE RETURN 1 1/2"-300# (LOCATED ON OPPOSITE SIDE)
8. DRAIN 3"-150# FLANGED
9. 480V/3/60 200 AMPS (LOCATED ON OPPOSITE SIDE)

DESIGN DATA

OVERALL LENGTH:
OVERALL WIDTH:
NET WEIGHT (INCL TRAILER):
CONTINUOUS CAPACITY:

45'-0"
8'-0"
55,000 LBS
DESIGNED FOR MAX. 70,000 PPH, 350 PSI
DESIGNED BOILER - HIGHER CUSTOM
PRESSURES AVAILABLE.

OXYGEN REMOVAL:
WATER PRESSURE:
CO₂ REMOVAL:

NOT MORE THAN .005cc/LITER
40-100 PSI
TO ZERO

NOTE: LOCATIONS MAY VARY SLIGHTLY BETWEEN MODELS

C.F. NO. TRAILER\70-DEA

INDECK 70,000 PPH RENTAL DEAERATOR