
## 24,000 PPH 300 PSI RENTAL BOILER

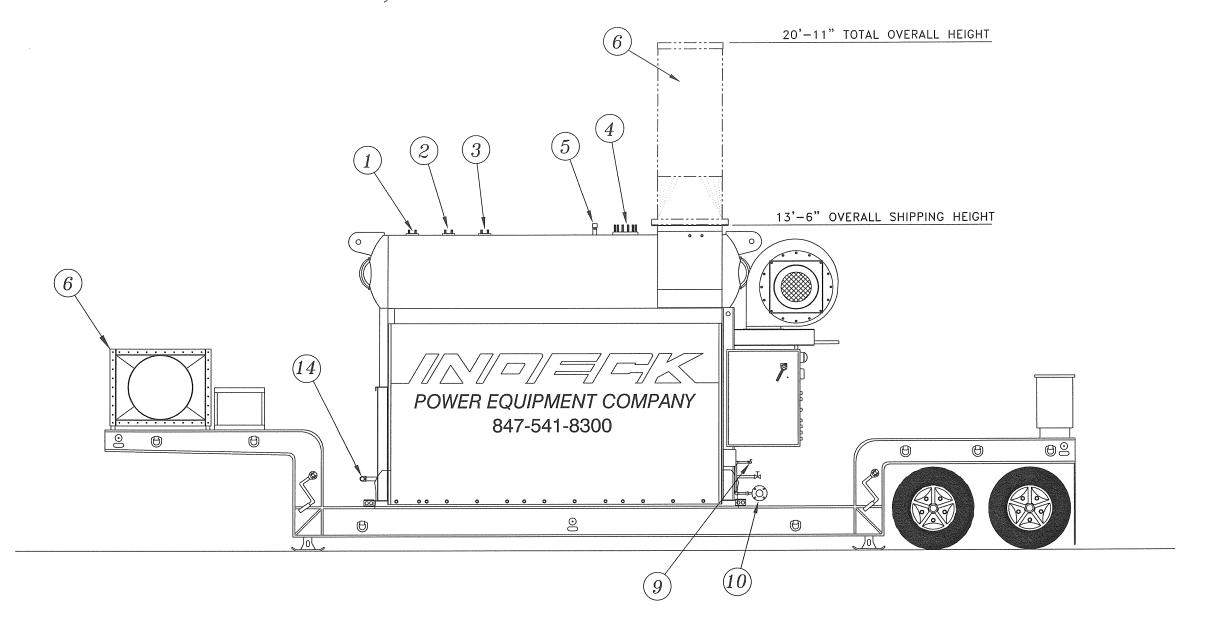

## INSTALLATION SERVICE CONNECTIONS

- 1 1/2"-300# SAFETY VALVE CONNECTIONS (SAFETY VALVE MUST BE REMOVED FOR TRANSPORT) 1` 1/2"-300# SAFETY VALVE CONNECTIONS
- (SAFETY VALVE MUST BE REMOVED FOR TRANSPORT)
- 1 1/2" FLANGED SAFETY VALVE CONNECTION (SAFETY VALVE MUST BE REMOVED FOR TRANSPORT)
- 6"-300 # MAIN STEAM OUTLET CONNECTION
  1 1/2" NPT DRUM VENT / AUX CONNECTION
  FLUE GAS STACK AND TRANSITION
- (REMOVED FOR TRANSPORT)
- 3/4" NPT AUX ATOMIZING / STEAM CONNECTION (LOCATED BEHIND CABINET)
- 1/2" NPT PILOT GAS CONNECTIONS (NAT OR PROPANE) (LOCATED BEHIND CABINET)

- 9. 1 1/2" NPT FUEL OIL SUPPLY CONNECTION
- 10. 3"-150 # FLANGED FUEL GAS CONNECTION
- 11. 1-1/2"-300 # BLOW OFF CONNECTION (LOCATED ON OPPOSITE SIDE OF TRAILER)
- 3/4" NPT CHEMICAL FEED CONNECTION 3/4" CONTINUOUS BLOWDOWN CONNECTION (LOCATED ON OPPOSITE SIDE OF TRAILER)
- 14. 1-1/2"- FEEDWATER SUPPLY CONNECTION (FEMALE)
- 15. 460/60/3 POWER SUPPLY 60 AMPS

## DESIGN DATA

OVERALL LENGTH: OVERALL WIDTH: NET WEIGHT (INCL TRAILER): CONTINUOUS CAPACITY: DESIGN PRESSURE: FEEDWATER TEMPERATURE: FURNACE VOLUME: CONVECTION HEATING SURFACE: RADIANT HEATING SURFACE: TOTAL HEATING SURFACE: GAS SUPPLY PRESSURE OIL SUPPLY PRESSURE FEED WATER PRESSURE

40'-0" 8'-0" 51,793 LBS 24,000 PPH 300 PSIG 220 DEG F 962 CU. FT. 4777 SQ. FT. 651 SQ. FT.

2109 SQ. FT. (A.S.M.E.) 8.0 PSIG (REGULATED BY CUSTOMER)

30 PSIG FLOODED MAX. 60-100 PSIG ABOVE OPERATING PRESSURE

NOTE: A NATURAL GAS OR PROPANE PILOT IS REQUIRED FOR OIL

NOTE 2: PROVIDE ADEQUATE WEATHER PROTECTION FOR BURNER, CONTROLS AND PERSONNEL

WHEELING, ILLINOIS 60090 WWW.INDECK.COM